

Hatch-bag

more space : no roof bars



Hatch-bag Luggage System
Installation Instructions.

Please read this before using your Hatch-bag.

When fixed securely to your car the hatch-bag can transport a 20kg load. Please ensure all straps are securely fastened to the frame.

Warnings :

- Do not exceed the indicated speed limit
- Do not use if the Hatch-bag obscures rear stop or driving lights
- If the Hatch-bag covers your registration plate please remove the plate and clip into the holder provided.
- If you are driving at night and the registration plate is attached to the bag, please ensure you use the light provided to illuminate the registration plate.

1. Your Hatch-bag comprises the following.

- 1 frame
- 1 weatherproof bag
- 2 foam sections upper and base
- 6 hatch hugger straps
- 2 long straps with 2 D rings on them
- Reg plate holder
- Light
- Small foam section for top strap



We suggest you also watch the installation video here : <https://vimeo.com/213982984>

2. If the hatch-bag will obscure your cars registration plate remove this first.


3. Fill your cars boot as normal, then place the 6 hatch huggers inside the boot as shown by the blue circles with the larger ends inside the cars boot place the two top straps on the parcel shelf. The hatch hugger that secures to the top of the frame in the middle is optional and we advise against using it if your car has a very large rear spoiler above the rear window. This top middle strap will need to be fed though the gap at the top of your cars tailgate. Its essential that the top left and right hatch huggers are attached to the top strap as high on the frame as possible, so place these on the rear parcel shelf or as high as possible in the boot. Make sure the bottom middle strap does not foul your cars tailgate latch.



4. Shut the boot and pull the ends of the 6 straps so that they are flush with the inside of the boot / tailgate. Take one of the long straps used to secure the hatch-bag/luggage to the frame and place it over the bottom foam section then place the frame into the bottom foam section and place on the top of the bumper, making sure the top to bottom strap on the frame and luggage strap are central and pass through the slot cut on the base foam section.



One of the long luggage straps must be placed under the frame between it and the base foam section.

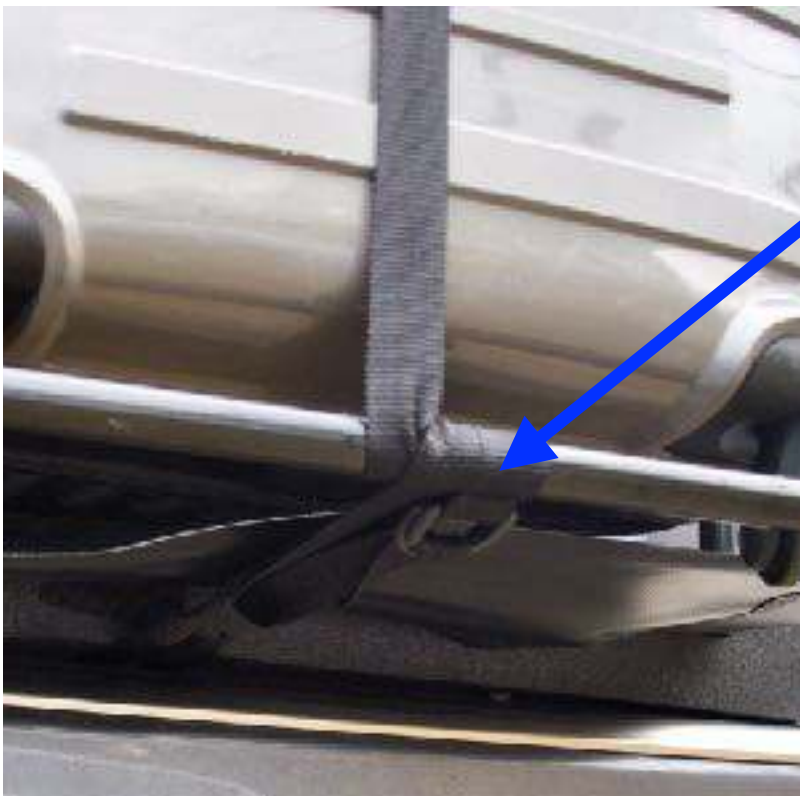

Bottom middle strap attaches to far end of frame and passes under bag base.

5. Place the rear foam section behind the frame with the top to bottom strap on the frame in front of it. Ensure the frame is sat in the slots, this section can be rotated to suit your cars tailgate angle, and allow you to get the frame as vertical as possible.



6. Now attach all six straps to the six fixing points on the hatch bag frame, and pull tight. Start with the top left and right straps. The bottom left and right straps can be cut to length to suit your car if you wish. If you melt the ends of the webbing with a flame it will melt the end and stop any fraying in the future. Its important that the top left and right straps are attached as high as possible on the frame as shown below.



Top straps must be as high as possible on the frame, pull the cross strap up on the frame if necessary.
The bottom middle strap attaches to far edge of base frame section.

7. If your car has a rear spoiler and you opt to use the upper middle strap feed the strap through the foam pad as shown, this will protect your cars paint




8. Once all the straps are tight and the frame does not move tie off the loose ends.



9. Now attach the bag or suitcase/luggage to the frame. Feed the straps around the frame twice as shown. Place them through the middle fixing, on the bag or cross them over if you are use your own luggage. If you will need the registration plate light feed the small strap through the top to bottom strap and the left to right strap through the back of the registration plate holder as shown below.



Attach registration plate light here.

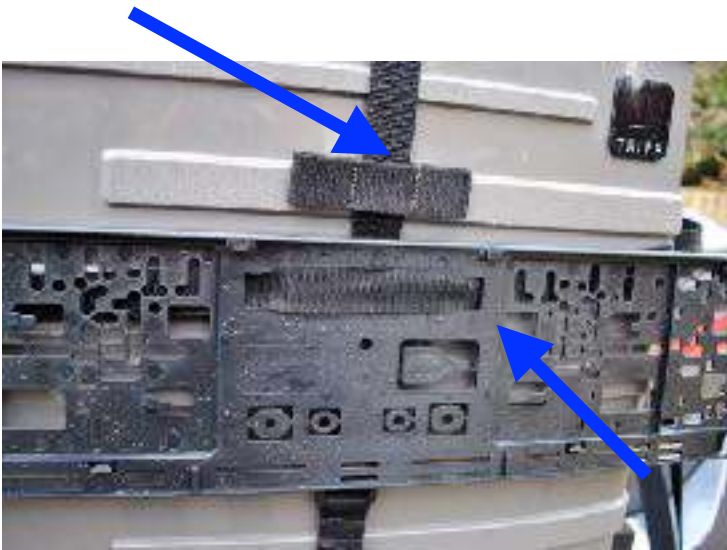

Clip registration plate into frame by removing the bottom section and clicking back into place, feed strap through the back of the holder to secure to bag.

10. Make sure the bag is pushed fully back into the frame and that the left to right strap is placed over the carry handles. We suggest you stop after the first 5-10 miles to check all straps are still tight and secure.



If you have any questions please do call us on 44 (0) 1865 693 063 or email antony@boot-bag.com. We always love to see photos of our products on customers cars, if you get a chance we would really appreciate some photos.

Warranty

Hatch-bag has a 12 month non transferable warranty covering defect in manufacture materials and workmanship. Defective products can be returned to us for replacement. The cost of transport to and from hatch-bag will be paid by the customer. Please ensure you get a returns number from us before returning any items.

Hatch-bag is manufactured in the UK by

Tabernus Peram Ltd
Chandos House
School Lane
Buckingham
Bucks
MK18 7EW
UK



Hatch-bags design is protected by international patents.